


XML-Structure

Root-Element: b2bOpticJobData

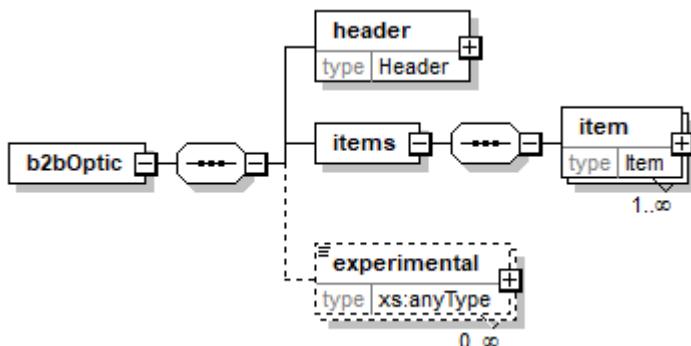

In the root-element the location of the XSD at schema.b2optic.com must be set, so the receiver could identify the version of XML.

```
<b2bOpticJobData xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://schema.b2optic.com/b2optic_jobdata_v
1.6.3.xsd">
```

header	
type	Header
occurs	1
description	head section with information about all orders in this xml
items	
type	sequence of item
occurs	1
description	main tag that include a list of order items
item (element of items)	
type	Item
occurs	1..n
description	one order
experimental	
type	anyType
occurs	0..n
description	section for internal tests at development


```

<xsd:element name="b2bOpticJobData">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element name="header" type="Header"/>
      <xsd:element name="items">
        <xsd:complexType>
          <xsd:sequence>
            <xsd:element name="item" type="Item" maxOccurs="unbounded"/>
          </xsd:sequence>
        </xsd:complexType>
      </xsd:element>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
  
```

```
</xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="experimental" type="xs:anyType" minOccurs="0"
maxOccurs="unbounded"/>
</xs:sequence>
</xs:complexType>
</xs:element>
```

From:
<https://wiki.b2boptic.com/> - **wiki.b2bOptic.com**

Permanent link:
<https://wiki.b2boptic.com/en:jobdata:version010603:structure>



Last update: **2017/06/19 18:08**