
# map (IProfilerMap)

b2bOpticJobData → items → item → pair → patient → iProfilerData → result → wavefrontCornea → map

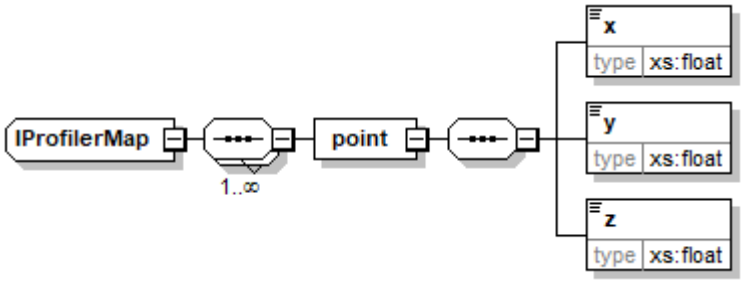


| point | |
|---|---|
| occurs | 1..n |

| x | |
|---|---|
| type | float |
| occurs | 1 |
| unity | µm |
| description | |

| y | |
|---|---|
| type | float |
| occurs | 1 |
| unity | µm |
| description | |

| z | |
|---|---|
| type | float |
| occurs | 1 |
| unity | µm |
| description | |

```
<xs:complexType name="IProfilerMap">
  <xs:sequence maxOccurs="unbounded">
    <xs:element name="point">
      <xs:complexType>
        <xs:sequence>
          <xs:element name="x" type="xs:float" />
          <xs:element name="y" type="xs:float" />
          <xs:element name="z" type="xs:float" />
        </xs:sequence>
      </xs:complexType>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

From:
http://wiki.b2boptic.com/ - **wiki.b2bOptic.com**

Permanent link:
**http://wiki.b2boptic.com/en:jobdata:version010604:complextypes:iprofilermap:wavefrontcornea**

Last update: **2020/05/15 11:17**