


B2BCatalogOrderOptionRuleIds

b2bOpticLensCatalog→lenses→lens
b2bOpticLensCatalog→options→option

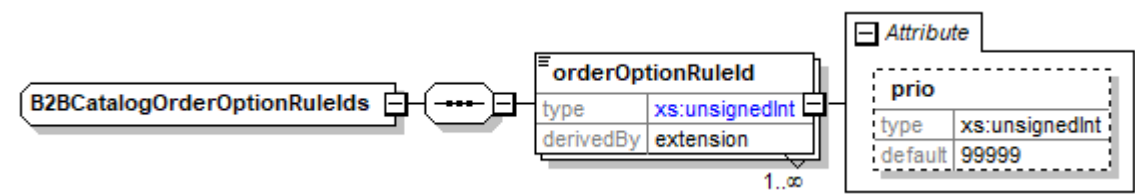

orderOptionRuleId	
type	xs:unsignedInt
occurs	1..∞
description	is ponting to id of orderOptionRules
prio (attribute of orderOptionRuleId)	
type	xs:unsignedInt
use	optional
default	99999
description	A lower number meens a higher priority. (Prio 1 is higher than prio 2).

```
<xs:complexType name="B2BCatalogOrderOptionRuleIds">
  <xs:sequence>
    <xs:element maxOccurs="unbounded" name="orderOptionRuleId">
      <xs:complexType>
        <xs:simpleContent>
          <xs:extension base="xs:unsignedInt">
            <xs:attribute default="99999" name="prio"
type="xs:unsignedInt"/>
          </xs:extension>
        </xs:simpleContent>
      </xs:complexType>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```