


header (Header)

[b2boptic](#) → header

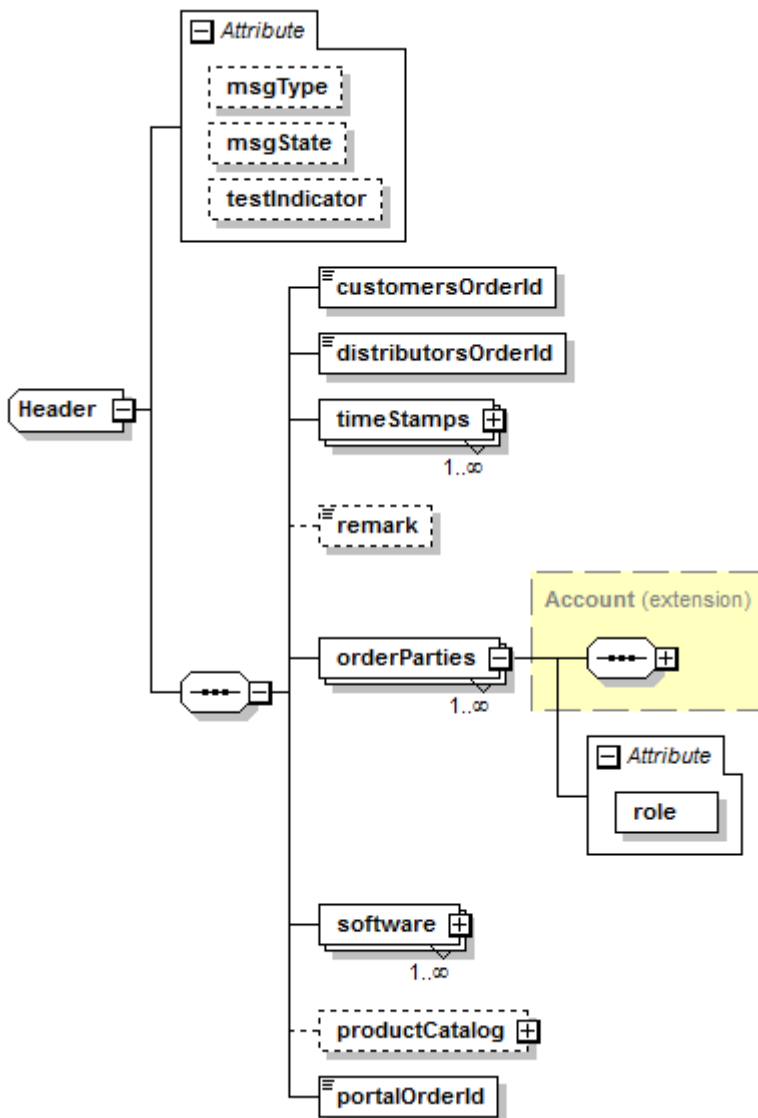

<i>msgType</i>	
type	MsgTypes
use	optional
default	REQUEST
description	
<i>msgState</i>	
type	MsgStates
use	optional
default	NEW
description	
<i>testIndicator</i>	
type	boolean
use	optional
default	false

testIndicator	
description	the orders are not productive, only for test
customersOrderId	
type	string
occurs	1
description	internal id for this batch of orders assigned by the sender
distributorsOrderId	
type	string
occurs	1
description	internal id for this batch of orders assigned by the distributor
timeStamps	
type	TimeStamps
occurs	1..n
description	list of timestamps
remark	
type	string
occurs	0..1
description	comment by the sender to the whole batch of orders
orderParties	
type	Account
occurs	1..n
description	serves as default, if nothing is specified in items section, these entries are used
role (attribute of orderParties)	
type	Roles
use	required
description	at least ORIGINATOR is required, if not specified in items section
software	
type	Software
occurs	1..n
description	list of software programs that create or edit the content
productCatalog	
type	ProductCatalog
occurs	0..1
description	product catalog that was used to select lenses and coatings
portalOrderId	
type	string
occurs	1
description	retailer's order id

```
<xs:complexType name="Header">
  <xs:sequence>
    <xs:element name="customersOrderId" type="xs:string"/>
    <xs:element name="distributorsOrderId" type="xs:string"/>
    <xs:element name="timeStamps" type="TimeStamps" maxOccurs="unbounded"/>
    <xs:element name="remark" type="xs:string" minOccurs="0"/>
  
```

```
<xs:element name="orderParties" maxOccurs="unbounded">
  <xs:complexType>
    <xs:complexContent>
      <xs:extension base="Account">
        <xs:attribute name="role" type="Roles" use="required"/>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
</xs:element>
<xs:element name="software" type="Software" maxOccurs="unbounded"/>
<xs:element name="productCatalog" type="ProductCatalog" minOccurs="0"/>
<xs:element name="portalOrderId" type="xs:string"/>
</xs:sequence>
<xs:attribute name="msgType" type="MsgTypes" use="optional"
default="REQUEST"/>
<xs:attribute name="msgState" type="MsgStates" use="optional"
default="NEW"/>
<xs:attribute name="testIndicator" type="xs:boolean" use="optional"
default="false"/>
</xs:complexType>
```

From:
<https://wiki.b2boptic.com/> - **wiki.b2bOptic.com**

Permanent link:
<https://wiki.b2boptic.com/en:lensorder:version010600:complextypes:header>

Last update: **2013/05/23 14:06**

