


header (Header)

b2boptic → header

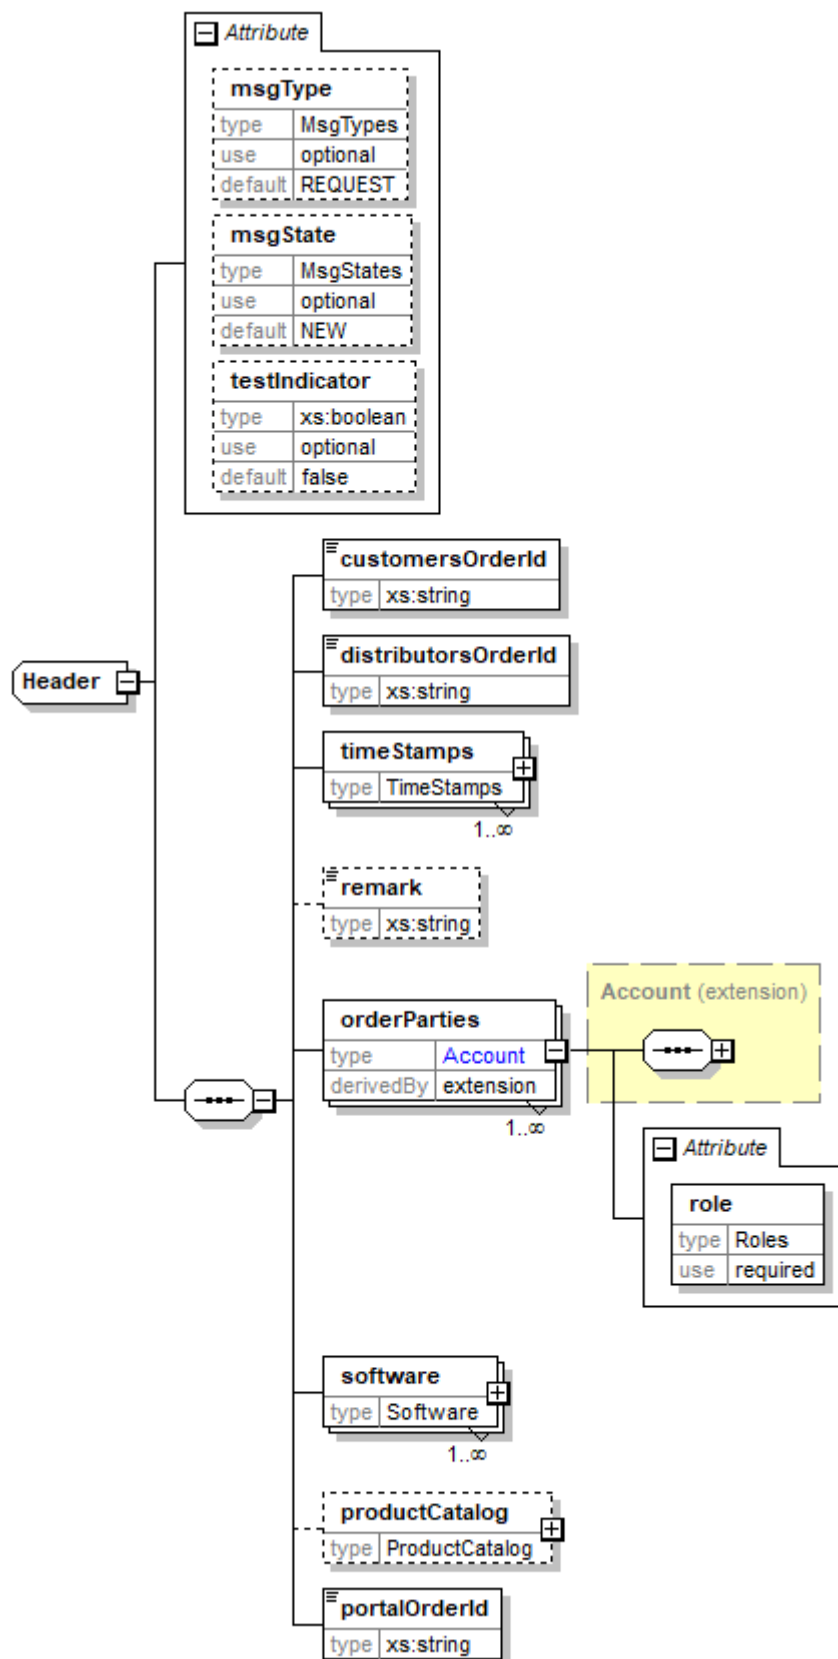

<i>msgType</i>	
type	MsgTypes
use	optional
default	REQUEST
description	

<i>msgState</i>	
type	MsgStates
use	optional
default	NEW
description	

<i>testIndicator</i>	
type	boolean
use	optional
default	false
description	the orders are not productive, only for test

<i>customersOrderId</i>	
type	string
occurs	1
description	internal id for this batch of orders assigned by the sender

<i>distributorsOrderId</i>	
type	string
occurs	1
description	internal id for this batch of orders assigned by the distributor

<i>timeStamps</i>	
type	TimeStamps
occurs	1..n
description	list of timestamps

<i>remark</i>	
type	string
occurs	0..1
description	comment by the sender to the whole batch of orders

<i>orderParties</i>	
type	Account
occurs	1..n
description	serves as default, if nothing is specified in items section, these entries are used

<i>role (attribute of orderParties)</i>	
type	Roles
use	required
description	at least ORIGINATOR is required, if not specified in items section

<i>software</i>	
type	Software
occurs	1..n
description	list of software programs that create or edit the content

<i>productCatalog</i>	
type	ProductCatalog
occurs	0..1

productCatalog	
description	product catalog that was used to select lenses and coatings
portalOrderId	
type	string
occurs	1
description	retailer's order id

```

<xs:complexType name="Header">
  <xs:sequence>
    <xs:element name="customersOrderId" type="xs:string"/>
    <xs:element name="distributorsOrderId" type="xs:string"/>
    <xs:element name="timeStamps" type="TimeStamps" maxOccurs="unbounded"/>
    <xs:element name="remark" type="xs:string" minOccurs="0"/>
    <xs:element name="orderParties" maxOccurs="unbounded">
      <xs:complexType>
        <xs:complexContent>
          <xs:extension base="Account">
            <xs:attribute name="role" type="Roles" use="required"/>
          </xs:extension>
        </xs:complexContent>
      </xs:complexType>
    </xs:element>
    <xs:element name="software" type="Software" maxOccurs="unbounded"/>
    <xs:element name="productCatalog" type="ProductCatalog" minOccurs="0"/>
    <xs:element name="portalOrderId" type="xs:string"/>
  </xs:sequence>
  <xs:attribute name="msgType" type="MsgTypes" use="optional"
default="REQUEST"/>
  <xs:attribute name="msgState" type="MsgStates" use="optional"
default="NEW"/>
  <xs:attribute name="testIndicator" type="xs:boolean" use="optional"
default="false"/>
</xs:complexType>

```

From:

<http://wiki.b2boptic.com/> - **wiki.b2bOptic.com**

Permanent link:

<http://wiki.b2boptic.com/en:lensorder:version010605:complextypes:header>

Last update: **2024/07/09 04:10**

