


B2BCatalogOpticalProperties

b2bOpticLensCatalog→lenses→lens
b2bOpticLensCatalog→options→option

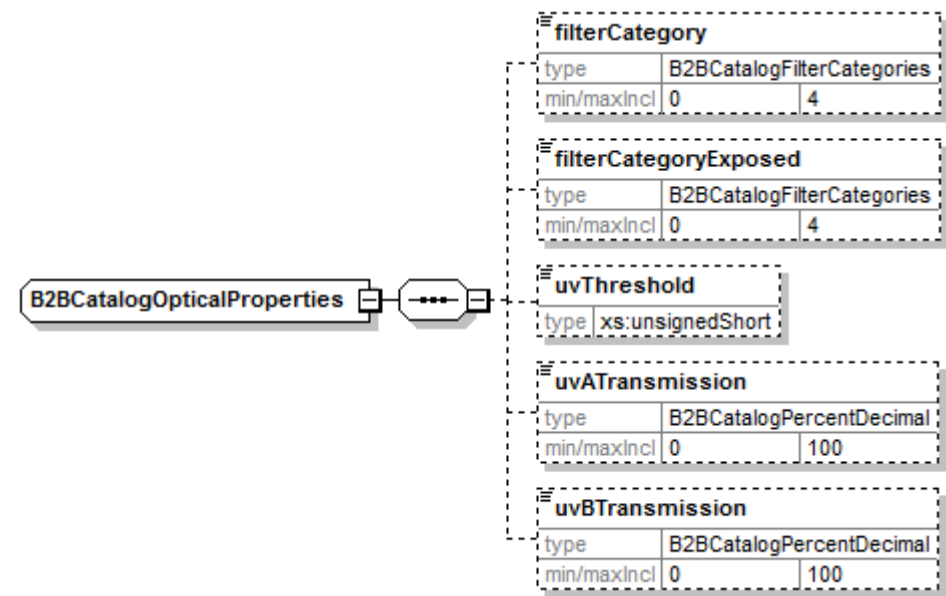

filterCategory	
type	B2BCatalogFilterCategories
occurs	0..1
description	From 0 to 4 according DIN EN ISO 8930-3
filterCategoryExposed	
type	B2BCatalogFilterCategories
occurs	0..1
description	From 0 to 4 according DIN EN ISO 8930-3 after beeing exposed to light (mainly relevant for photocromics)
uvThreshold	
type	xs:unsignedShort
unity	nm
occurs	0..1
description	describes the threshold for UV light
uvATransmission	
type	B2BCatalogPercentDecimal
occurs	0..1
description	describes the percentage of solar UVA light that is transmitted through the lens
uvBTransmission	
type	B2BCatalogPercentDecimal
occurs	0..1
description	describes the percentage of solar UVB light that is transmitted through the lens

```
<xs:complexType name="B2BCatalogOpticalProperties">
  <xs:sequence>
    <xs:element minOccurs="0" name="filterCategory"
```

```
type="B2BCatalogFilterCategories"/>
  <xs:element minOccurs="0" name="filterCategoryExposed"
type="B2BCatalogFilterCategories"/>
  <xs:element minOccurs="0" name="uvThreshold" type="xs:unsignedShort"/>
  <xs:element minOccurs="0" name="uvATransmission"
type="B2BCatalogPercentDecimal"/>
  <xs:element minOccurs="0" name="uvBTransmission"
type="B2BCatalogPercentDecimal"/>
  </xs:sequence>
</xs:complexType>
```

From:

<http://wiki.b2boptic.com/> - **wiki.b2bOptic.com**

Permanent link:

<http://wiki.b2boptic.com/en:lenscatalog:version070000:complextypes:b2bcatalogopticalproperties>

Last update: **2017/07/10 13:47**

